


# 563YSBT



## 不锈钢

悬臂梁称重传感器

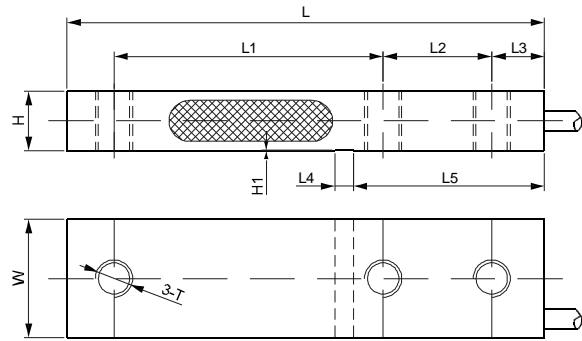


### 尺寸

量程	H	H1	L	L1	L2	L3	L4	L5	W	T
kg/mm										
500...2,000	16.0	0.25	128.5	72.4	29.2	14.2	5.0	51.4	31.8	M10
lb/inches (由上述尺寸转换)										
1,102...4,409	0.63	0.01	5.06	2.85	1.15	0.56	0.20	2.02	1.25	M10

### 技术参数

相关量程	kg或t	500kg	1t	2t
产品毛重	kg/lb	0.4 / 0.9	0.5 / 1.2	0.8 / 1.7
灵敏度	mV/V	2.0 ± 0.1%		
零位输出	mV/V	±0.06		
非线性	%	< ±0.023		
重复性	%	< ±0.017		
滞后误差	%	< ±0.023		
蠕变	%	< ±0.023		
阻抗	Ω	1100 ± 50		
额定激励电压	V(DC/AC)	10 (15V 最大)		
绝缘阻抗	GΩ	> 2 [ 50 VDC ]		
正常工作温度范围	°C/°F	-10...40 / 14...104		
安全极限载荷	% of full scale	150		
破坏极限载荷	% of full scale	300		
密封方式		密封, IP67		



- Exc+ 红
- Sig+ 绿
- Exc- 黑
- Sig- 白
- 屏蔽线

### 可 选

- 耐高温 120°C [248°F]
- 六线制